newtech LIVING

INSTALLATION, PRODUCT CARE & WARRANTY

ACCESSIBLE BASIN MIXER - T7369



The more stars the more water efficient

WATER RATING

www.waterefficiency.govt.nz

7 litres per minute

In accordance with AS/NZS 6400

Newtech Bathroomware

Thank you for purchasing Newtech Living Tapware.

Your Newtech Living Tapware has been crafted using high quality DR Lead Free Brass and will have a long lasting and productive life, provided it is used in accordance with manufacturers general conditions.

Your Newtech Living Tapware must be installed by a registered plumber.

CARE OF YOUR NEWTECH TAPWARE

To clean, use water with a soft damp cloth. Any harsh scrubbing or scratching of the product surface is strictly prohibited, same to the use of any cleaning products which contain acid or any corrosive agents.

WARRANTY

For all warranty information please refer to www.newtech.co.nz/warranty.

INSTALLATION

For pressure exceeding 5 bar/500kPa, install a pressure reducing valve. If a system is required to be pressure tested the water supply to the mixer must be capped off prior to testing. If a mixer has been subjected to pressures over 5 bar/500kPa then a new cartridge must be installed, at the installers/owners expense for warranty to be valid.

Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters and ensure water temperature does not exceed 65°C and pressure does not exceed 5 bar/500kPa. Turn off water supply before installation and check for leaks after every installation. Failure to do so may void warranty.


CONTACT US

Phone 0800 728 662 Email sales@newtech.co.nz

newtech LIVING

INSTALLATION INSTRUCTIONS

IMPORTANT NOTE: Before starting installation of your tap, turn off the water supply.

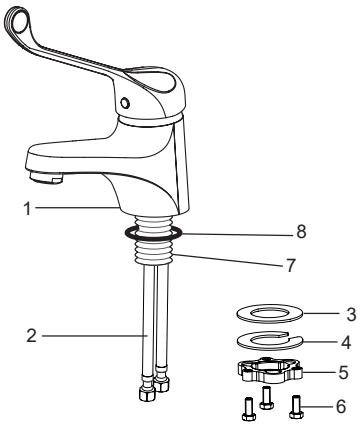

1. Faucet Body
2. Hot & Cold Hose
3. Rubber Washer
4. Metal Washer
5. Lock Nut
6. Screw
7. Pipe
8. O-Ring

No.	Instruction
1	Place the rubber gasket over the hole in kitchen where mixer is to be installed.
2	Fit the mixer body onto the basin/kitchen hole.
3	Place the mounting gasket and sheet on top of the sheet and fit it onto the mounting bolt using the mounting nut to tighten up the mixer from the underneath of the kitchen, to be easy, you can use a mounting wrench
4	Install the flexible hoses into the mixer body from underneath, and ensure the flexible hoses are hand tightened into place (DO NOT USE SPANNNER TO TIGHTEN AS IT CAN DAMAGE O RING).
5	It is important to flush out the supply pipes before installing the mixer and connecting the flexible hoses to hot/cold water supply, regardless whether a stop valve and filter has been installed or not. This procedure will stop foreign objects entering the cartridge.

TECHNICAL SPECIFICATIONS

Minimum Pressure = 150kPa

Maximum Operating Pressure = 500kPa (As per NZ Building Code AS/NZ 3500.1)

Maximum Operating Temperature = 65°C

Minimum bend for flexible hose is 35mm radius. Do not twist, stretch or crush the hoses.

For Domestic use only

newtech LIVING