# EVOKE TAPWARE RANGE

## INSTALLATION, PRODUCT CARE & WARRANTY

### SLIDE SHOWER - ET6110-1





## Thank you for purchasing Newtech Living Tapware.

Your Newtech Living Tapware has been crafted using high quality durable stainless steel and will have a long lasting and productive life, provided it is used in accordance with manufacturers general conditions.

**Your Newtech Living Tapware must be installed by a registered plumber.**

### CARE OF YOUR NEWTECH LIVING TAPWARE

To clean, use water with a soft damp cloth. Any harsh scrubbing or scratching of the product surface is strictly prohibited, same to the use of any cleaning products which contain acid or any corrosive agents.

### WARRANTY

For all warranty information please refer to www.newtech.co.nz/warranty.

### INSTALLATION

For pressure exceeding 5 bar/500kPa, install a pressure reducing valve. If a system is required to be pressure tested the water supply to the mixer must be capped off prior to testing. If a mixer has been subjected to pressures over 5 bar/500kPa then a new cartridge must be installed, at the installers/owners expense for warranty to be valid.


Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters and ensure water temperature does not exceed 65°C and pressure does not exceed 5 bar/500kPa. Turn off water supply before installation and check for leaks after every installation. Failure to do so may void warranty.

### CONTACT US

**Phone 0800 728 662  Email sales@newtech.co.nz**

newtech LIVING

# INSTALLATION INSTRUCTIONS

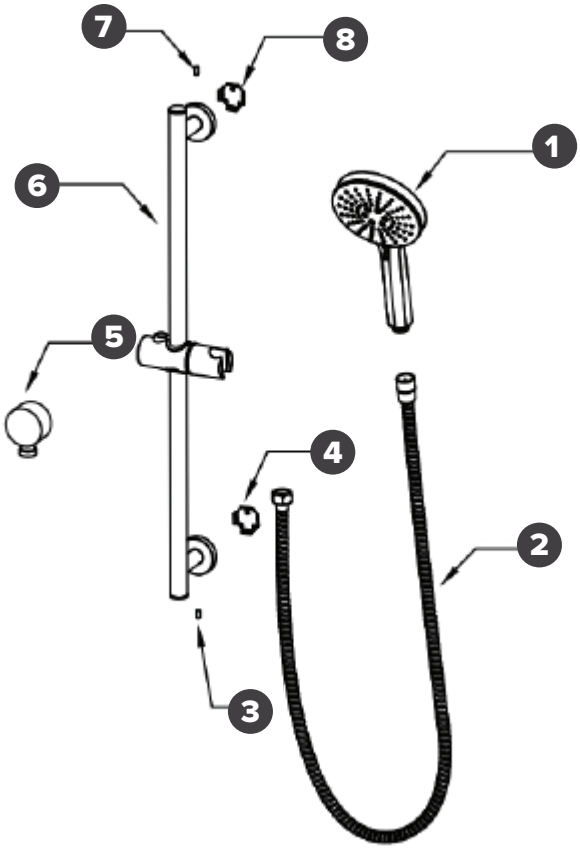



| No. | Part Name |
|---|---|
| 1 | Handheld Showerhead |
| 2 | Hose |
| 3 | Screw |
| 4 | Fixed Piece |
| 5 | Water Outlet Nozzle |
| 6 | Shower Rail |
| 7 | Screw |
| 8 | Fixed Piece |

newtech LIVING

# INSTALLATION INSTRUCTIONS

**IMPORTANT NOTE: Before starting installation of your tap, turn off the water supply. Take care during installation to ensure the connecting threads do not damage the flow controllers.**

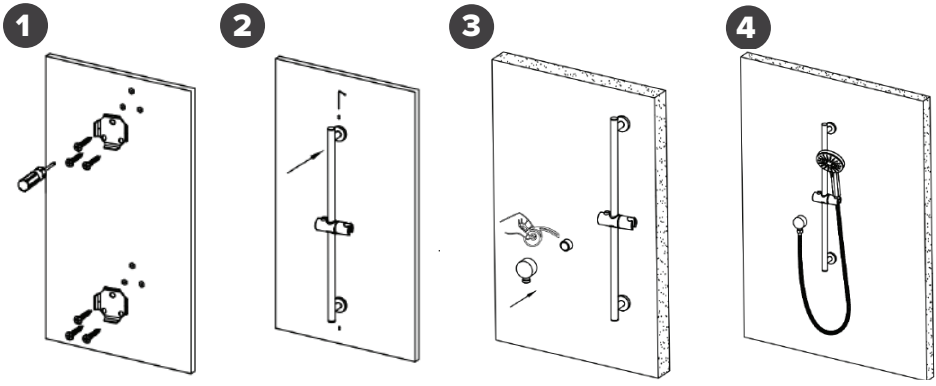


| No. | Instruction |
|---|---|
| 1 | Drill holes on the wall according to the size of the fixed holes, install both fixed pieces onto the wall with screws. |
| 2 | Place the shower rail in position over the wall inlet and wall adapter. Fasten by tightening the top and bottom screws. |
| 3 | Apply teflon tape tape around the thread of the water pipe then fix the water outlet nozzle to the water pipe. Drill a hole on the wall according to the size of the fixed hole, install both fixed pieces onto the wall with screws. |
| 4 | Install the hose and hand held shower head. |
| 5 | Turn on mains supply and check for any leaks. |

## TECHNICAL SPECIFICATIONS

Suitable for mains pressure only

Minimum Pressure = 150kPa

Maximum Operating Pressure = 500kPa (As per NZ Building Code AS/NZ 3500.1)

Maximum Operating Temperature = 65°C

Minimum bend for flexible hose is 35mm radius. Do not twist, stretch or crush the hoses.

**For Domestic use only**

newtech LIVING