



## EVOKE TAPWARE RANGE

INSTALLATION, PRODUCT CARE & WARRANTY

SLIDE SHOWER - ET6110



**WATER RATING**  
[www.waterrating.gov.au](http://www.waterrating.gov.au)

**9** litres per minute

In accordance with AS/NZS 6400

Newtech Bathroomware



## **Thank you for purchasing Newtech Tapware.**

Your Newtech Tapware has been crafted using high quality durable stainless steel and will have a long lasting and productive life, provided it is used in accordance with manufacturers general conditions.

**Your Newtech Tapware must be installed by a registered plumber.**

### **CARE OF YOUR NEWTECH TAPWARE**

To clean, use water with a soft damp cloth. Any harsh scrubbing or scratching of the product surface is strictly prohibited, same to the use of any cleaning products which contain acid or any corrosive agents.

### **WARRANTY**

For all warranty information please refer to [www.newtech.co.nz/warranty](http://www.newtech.co.nz/warranty).

### **INSTALLATION**


For pressure exceeding 5 bar/500kPa, install a pressure reducing valve. If a system is required to be pressure tested the water supply to the mixer must be capped off prior to testing. If a mixer has been subjected to pressures over 5 bar/500kPa then a new cartridge must be installed, at the installers/owners expense for warranty to be valid.

Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters and ensure water temperature does not exceed 65°C and pressure does not exceed 5 bar/500kPa. Turn off water supply before installation and check for leaks after every installation. Failure to do so may void warranty.

### **CONTACT US**

Phone 0800 728 662 Email [sales@newtech.co.nz](mailto:sales@newtech.co.nz)


# INSTALLATION INSTRUCTIONS

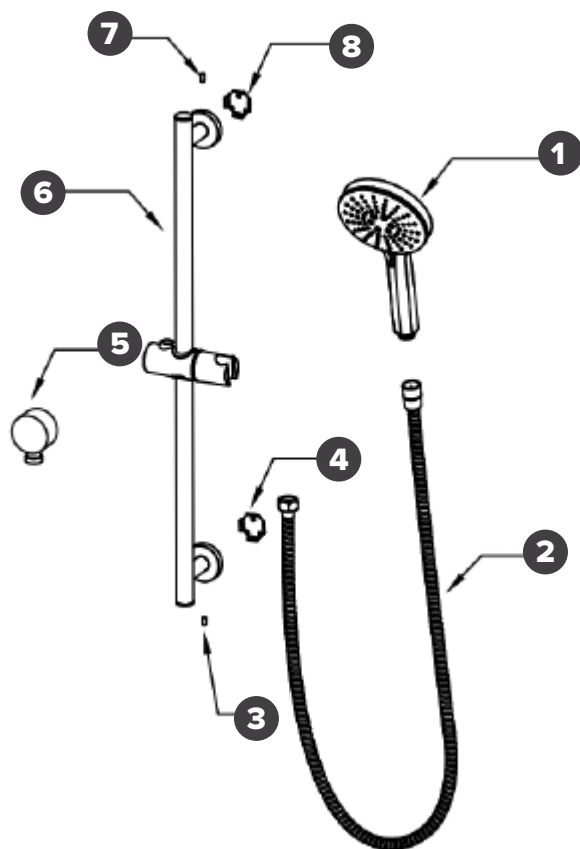

No.	Part Name
1	Handheld Showerhead
2	Hose
3	Screw
4	Fixed Piece
5	Water Outlet Nozzle
6	Shower Rail
7	Screw
8	Fixed Piece

# INSTALLATION INSTRUCTIONS

**IMPORTANT NOTE:** Before starting installation of your tap, turn off the water supply. Take care during installation to ensure the connecting threads do not damage the flow controllers.

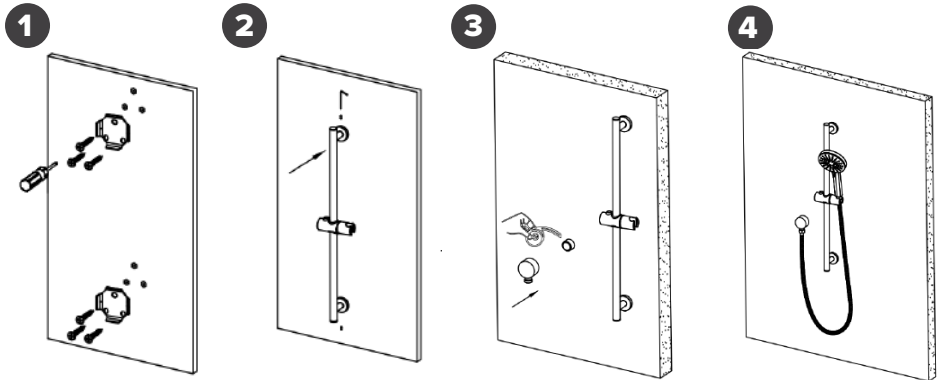

No.	Instruction
1	Drill holes on the wall according to the size of the fixed holes, install both fixed pieces onto the wall with screws.
2	Place the shower rail in position over the wall inlet and wall adapter. Fasten by tightening the top and bottom screws.
3	Apply teflon tape around the thread of the water pipe then fix the water outlet nozzle to the water pipe. Drill a hole on the wall according to the size of the fixed hole, install both fixed pieces onto the wall with screws.
4	Install the hose and hand held shower head.
5	Turn on mains supply and check for any leaks.

## TECHNICAL SPECIFICATIONS

Suitable for mains pressure only

Minimum Pressure = 150kPa

Maximum Operating Pressure = 500kPa (As per NZ Building Code AS/NZ 3500.1)

Maximum Operating Temperature = 65°C

Minimum bend for flexible hose is 35mm radius. Do not twist, stretch or crush the hoses.

**For Domestic use only**